

CONDENSATE REMOVAL PUMP

Simple-12

COMPACT SIZE

SUITABLE FOR MOST WALL-MOUNTED, DUCTED AND CONSOLE AIR CONDITIONERS

UP TO
36,000
BTU/H
10kW

MAX. FLOW
12L/H*

PROTECTION
IP64

MAX. SUCTION LIFT
16M

NOISE LEVEL
LOW

EXETEC
www.exetec-pumps.ru

- AIR CONDITIONING
- REFRIGERATION
- HEATING

SKU: **ESMP12**




Complete package




- UL94-V0 compliant casing
- Low noise level
- Universal mounting
- Sealed connector
- Easy installation
- Overheating protection
- IP64 Dust and splash protection
- 100% tested

- Reliable and quiet
- Affordable price
- Easy Plug & Play connection
- Compact size
- Built-in filter
- Accessories included

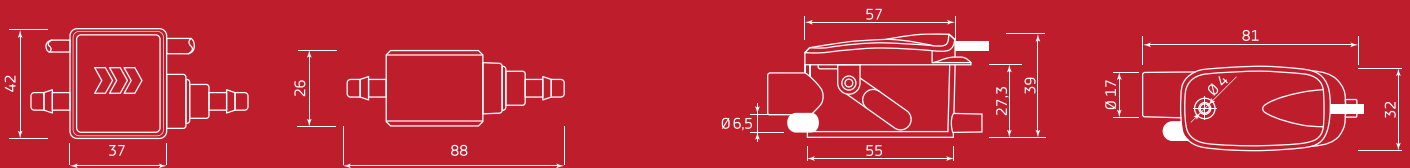

Performance graph

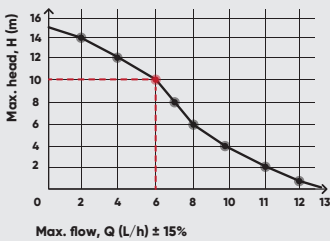

Max. flow: 12L/h* @ 0m head
 Max. recommended head: 10m
 Max. suction lift: 1,5m
 Noise level: Low
 Class: II appliance
 Power supply: 230 VAC at 50Hz - 15W
 Operation cycle: 100%
 Protection: IP64
 Thermal protection: Yes, auto restart
 Safety switch: No
 Self-priming: Yes

Operation temperature: 5 - 45°C / 41 - 113°F
 Max. water temperature: 40°C / 104°F
 Storage temperature: 1 - 70°C / 33 - 158°F
 Permissible altitude: up to 2500m
 Dimensions (mm):
 - Pump module: 37x42x26
 - Sensor module: 81x39x32
 A self-extinguishing body case (UL94-V0 compliant)
 * tolerance ± 15%



Made in the Urals
 European quality,
 Asian price

Recommended accessories:

- 1 Amp fuse with holder SKU: D01 001
2. PVC tube: internal Ø6mm, external Ø9mm, and 25 m length SKU: D02 003
3. Pump cleaning flask SKU: E01 001, SKU: E01 002
4. Clamp spring: Ø 6mm (¼in) SKU: B01 001
5. Reversing valve: Ø6mm (¼in) SKU: C07 001