

ULTRA COMPACT SLIMECOLINE CONDENSATE REMOVAL PUMP

IDEAL SOLUTION FOR THE INDOOR UNITS OF COMPACT AIR CONDITIONERS UP TO 8 KW (28,000 BTU)

UP TO 28,000 BTU/H
8kW

MAX. FLOW
11L/H*

PROTECTION
IP64

MAX. SUCTION LIFT
14M

NOISE LEVEL
LOW

EXETEC
www.exetec-pumps.ru

- AIR CONDITIONING
- REFRIGERATION
- HEATING

SKU: ESELP11





Complete package




- UL94-V0 compliant casing
- Low noise level
- Universal mounting
- Sealed connector
- Easy installation
- Overheating protection
- IP64 Dust and splash protection
- Openings for mounting and fixing

- Ultra compact size
- Transparent level sensor
- Easy Plug & Play connection
- Reliable and quiet
- Built-in filter
- Accessories included

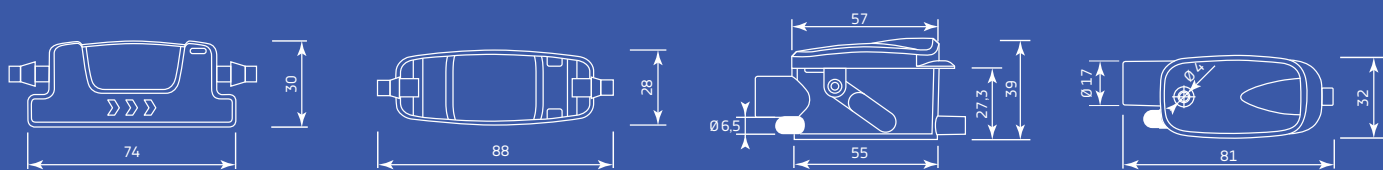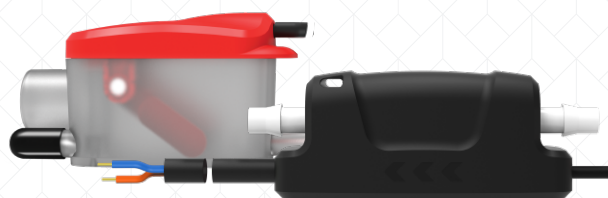

Performance graph

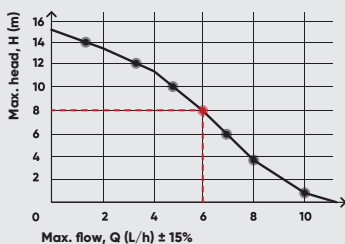

Max. flow: 11L/h* @ 0m head
 Max. recommended head: 8m
 Max. suction lift: 1.5m
 Noise level: Low
 Class: II appliance
 Power supply: 230 VAC at 50Hz - 15W
 Operation mode: 100% (the pump can run continuously)
 Protection: IP64
 Thermal protection: Yes, auto restart
 Safety switch: No
 Self-priming: Yes

Operation temperature: 5 - 45°C / 41 - 113°F
 Max. water temperature: 40°C / 104°F
 Storage temperature: 1 - 70°C / 33 - 158°F
 Permissible altitude: up to 2500m
 Dimensions (mm):
 - Pump module: 88x30x28
 - Sensor module: 81x39x32
 A self-extinguishing body case (UL94-V0 compliant)

* tolerance ± 15%



Recommended accessories:

- 1A fuse with holder SKU: D02 001
- PVC pipe: internal Ø6mm, external Ø9mm, and 25mm length. SKU: D02 003
- Pump cleaning flask SKU: E01 001, SKU: E01 002
- Clamp spring: Ø6mm (¼in) APT: B01 001
- Reversing valve: Ø6mm (¼in) SKU: C07 001



Made in the Urals
European quality, Asian price